

T - 203 - BLACK-BA

BLACK ALUMINUM TAPE




General description

Self adhesive black coloured aluminum tape with released liner

Adhesive : acrylic

Protective liner : siliconized paper

Outside colour : black

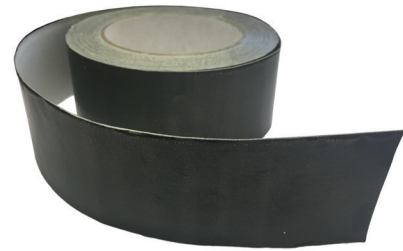

Technical specifications

	TECHNICAL DATA	TOLERANCES	TEST METHOD
WIDTH (mm)	50/75/110	+/- 3 mm	/
LENGTH (m)	45	+/- 0,3 m	/
ALUMINIUM THICKNESS (micron)	30	+/- 10 %	ISO 534
TOTAL THICKNESS (micron)	65	+/- 10 %	/
PEAL (N / 25 mm)	9	/	FTM1
TACK (N / 25 mm)	9	/	FTM9
SHEAR (1 Kg 25 x 25 mm) hours	200	/	FTM8
SERVICE TEMPERATURE (°C)	-20 / +110	/	/
APPLICATION TEMPERATURE (°C)	+10 / +40	/	/

Application

Surface should be clean, dry and free of dust and oil.

Storage

In a dry and well ventilated room, protected against dust and direct sun rays and at temperatures between + 10°C and +30 °C.

Under these conditions, the adhesive tapes could be stored a minimum of 12 months. Rolls should be stored flat on the slit edge and in their original packaging.

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.

2016.04.14