

T - 47 - SRN & SRI

DUCT SUSPENSION CLAMPS - SINGLE NUT



General description

Rings for suspension of rigid circular ducts

Rapid hanging system for diameters 400 mm and smaller

Easy set up

Available without liner (SRN) or with liner (SRI)

Available in stainless steel on request




Technical specifications

	DIA ≤ 400 mm	DIA ≥ 450 mm
MATERIAL	Galvanized steel	Galvanized steel
SINGLE THREAD CENTRAL NUT	M8	-
THICKNESS	1,8 mm	2,5 mm
WIDTH	20 mm	25 mm
SIDE FIXINGS	M6 x 20	Hole dia. 11 mm + Bolts M10 x 25
MAXIMUM RECOMMENDED LOAD (KG)	70	-
MAX. RECOMMENDED LOAD WITH 2 ANCHOR POINTS	-	200
WELD RESISTANCE OF CENTRAL NUT (TORQUE : N/m)	Max. 25	Max. 25

Load rating is covered by a 5 : 1 safety factor & based upon a vertically applied load

Application

≤ 400 mm

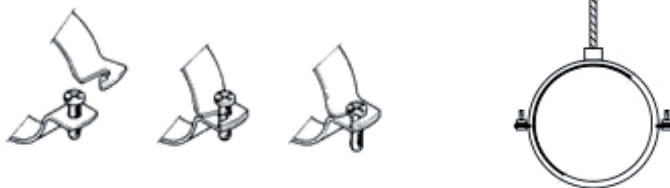

≥ 450 mm



Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.

2017.04.14