

### General description

The airtight sleeve, developed to limit the energy waste in buildings, is recommended to neutralize vibrations caused by air handling units, fans or other equipment connected to air ducts.

Their low rate of leak allows airtightness reaching Class C according to the EN 15727 standard.



### Technical description

- Standard cloth width : 200 mm
- Standard cloth diameter in mm : 125, 160, 200, 250, 315, 355, 400, 450, 500, 560 and 630
- High airtightness : reaching Class C according to the EN 15727 standard thanks to its peripheral EPDM joints
- Quick installation : 50% faster than regular sleeves

### Technical specification - Fabric

		MANET
Material	Backing	Fiberglass cloth
	Coating	Silicone
Weight		470 g/m <sup>2</sup> (17,1 oz/sq yd)
Color		Grey
Temperature range		-20°C / + 90°C (-4°F to 194°F)
Classifications		M0 (french standards)




Ø125 to 400 mm :  
2 integrated collars  
(quick set up without tools)



Ø450 to 710 mm :  
2 tightening collars  
(phillips screwdriver)

### Sleeve's leak ratio (EN 15727)

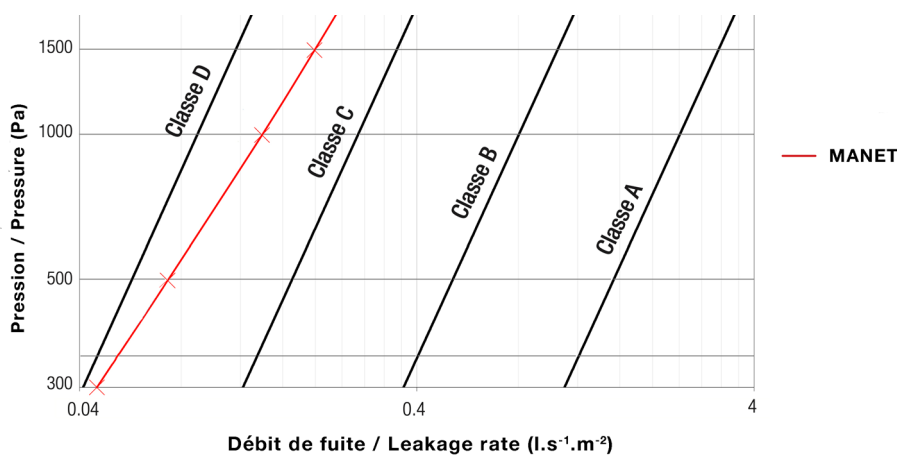

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.