

General description

The **EASY CAD** is a male fitting mounted with gasket.

- **Quick and easy installation “Plug in” type:**
simplified assembly between ducts, guaranteed to save time.
- **Class C sealing:**
Double-lip seal guarantees Class C tightness.
- **Quality design :**
High-quality aesthetics, perfect for installations with no maintenance access.





Technical specification - Access doors

PANELS	Material	Galvanized steel Z275
	SEALING GASKET	
	Type	High quality PUR gasket
	Dimension	6 mm x 15 mm
	Density	+/- 33 Kg / m ³
COMPONENTS COMPRESSION SYSTEM	Screws	2 screws: M8x40 or M10x40 crimped on internal panel
	Springs	2 compressions springs
	Knobs	2 plastic knobs with metal insert M8 or M10



- 1 Double-lip seal
- 2 Z275 galvanized steel body

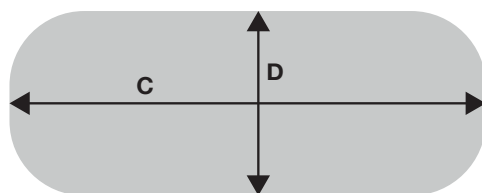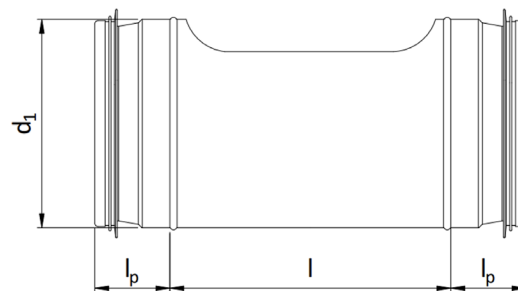

SIZES	d1	l	lp	C	D
125	125	230	35	170	72
160	160	250	35	170	72
200	200	310	35	250	150
250	250	310	45	250	150
315	315	310	45	250	150

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.