

General description

The **EASY CAD** is a male fitting mounted with gasket.

- **Quick and easy installation “Plug in” type:**
simplified assembly between ducts, guaranteed to save time.
- **Class C sealing:**
Double-lip seal guarantees Class C tightness.
- **Quality design :**
High-quality aesthetics, perfect for installations with no maintenance access.





Technical specification - Access doors

PANELS	Material	Galvanized steel Z275
	SEALING GASKET	
	Type	High quality PUR gasket
	Dimension	6 mm x 15 mm
	Density	+/- 33 Kg / m ³
COMPONENTS COMPRESSION SYSTEM	Screws	2 screws: M8x40 or M10x40 crimped on internal panel
	Springs	2 compressions springs
	Knobs	2 plastic knobs with metal insert M8 or M10



- 1 Double-lip seal
2 Z275 galvanized steel body

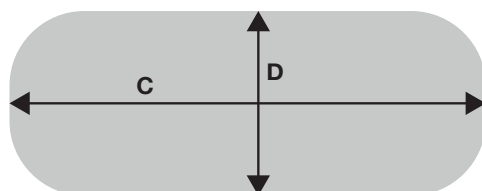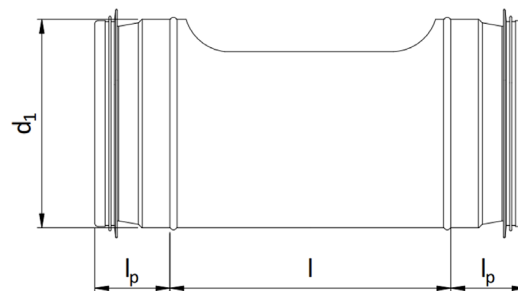

SIZES	d1	l	lp	C	D
125	125	230	35	178	74
160	160	250	35	202	94
200	200	310	35	258	142
250	250	310	45	258	147
315	315	310	45	258	152