


### General description

The suspension rings SRN (without liner) and SRI (with liner) are used as an hanging system for rigid circular ducts.

They are also available in stainless steel SS SRN (without liner) and SS SRI (with liner).

For diameters up to 400 mm, the rings are equipped with an easy closure system.

- Threaded central nut fitted for sizes up to 400 mm
- Easy and rapid installation.



SRN




SRI

### Technical specification

	DIA ≤ 400 MM		DIA ≥ 450 mm	
	Galvanized steel	Stainless steel 316	Galvanized steel	Stainless steel 316
<b>Material</b>	Galvanized steel	Stainless steel 316	Galvanized steel	Stainless steel 316
<b>Double threaded central nut</b>	M8		-	
<b>Thickness</b>	1,8 mm	2 mm	2,5 mm	
<b>Width</b>	20 mm		25 mm	
<b>Side fixings</b>	M6 x 20 mm		Hole dia. 11 mm + Bolts M10 x 25 mm	Hole dia. 11 mm, for threaded rods M10
<b>Maximum recommended load with central suspension nut *</b>	70 Kg		-	
<b>Max. recommended load through side anchor points *</b>	-		200 Kg	
<b>Weld resistance of central nut (torque N/m)</b>	Max. 25		Max. 25	
*Load rating is covered by a 5 : 1 safety factor & based upon a vertically applied load				

### Application

#### ≤ 400 MM

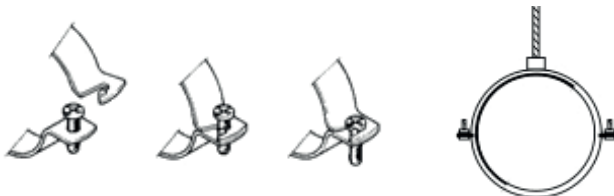

#### ≥ 450 MM



Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.