

General description

The **Rubber Mounts SG** are rubber-metal vibration absorbers, especially indicated for supporting machinery elastically, protecting the environment against the transmission of vibrations, impacts and structural noise.

They provide excellent insulation at medium and high frequencies (1500 rpm and above). It distributes the stresses better and thanks to the engraving of the base, it promotes grip and prevent the machine from pivoting.

The Rubber Mounts are supplied individually or in pack of 4 called **Airpack**.

Airpack 40, 60 and 70 include : 4 rubber mounts, 8 nuts zinc coated, 4 washers zinc coated.


SG 80 and SG90 are supplied in individual pack: 1 rubber piece, 1 threaded rod, 2 nuts and 1 washer.




Technical specification

- Manufactured in NR (Natural Rubber) 55° Sh A.


| | SG 40 | SG 60 | SG 70 | SG 80 | SG 90 |
|--|-------|-------|-------|-------|-------|
| A (mm) | 17 | 20 | 22 | 26 | 35 |
| B (mm) | 45 | 60 | 75 | 80 | 100 |
| C | M8 | M10 | M10 | M12 | M16 |
| D (mm) | 48 | 57 | 57 | 74 | 108 |
| Min. load (kg) | 8 | 25 | 45 | 80 | 150 |
| Max. load (kg) | 70 | 100 | 150 | 300 | 800 |
| Natural frequency Fn 3mm (Hz) | 21 | 21 | 21 | 21 | 21 |
| Natural frequency Fn 7mm (Hz) | 12 | 12 | 12 | 12 | 12 |

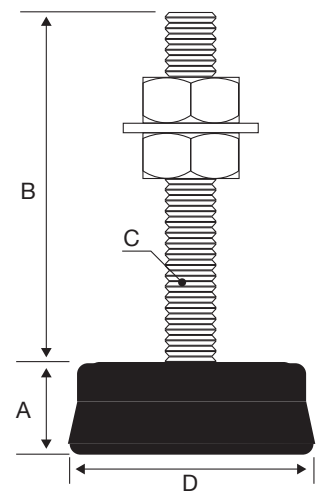


Application




Machines & tools



Plastic & rubber injectors



Motors & Pump



Air conditioning

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.